



Interstate 84 / Nelson Point to Lime Paving – 2015

Aug. 2014 Update


OVERVIEW: This project will grind/inlay I-84 pavement from Nelson Point near the Ash Grove Cement Plant (mile point 330.7) to Lime (mile point 342.12). Work will also include some overlay paving on Plano road.



During construction the top few inches of pavement will be ground out and new asphalt inlaid. The project also includes guardrail improvements, rumble strips, and striping.

CONSTRUCTION IMPACTS: Single lane and shoulder closures allowing for continuous traffic flow in the open lane. No delays are anticipated. Over width loads will be accommodated through the project area. Day and nighttime work may be expected.

TIMELINE: The project will go to bid in November, 2014, with construction occurring between spring and fall 2015.

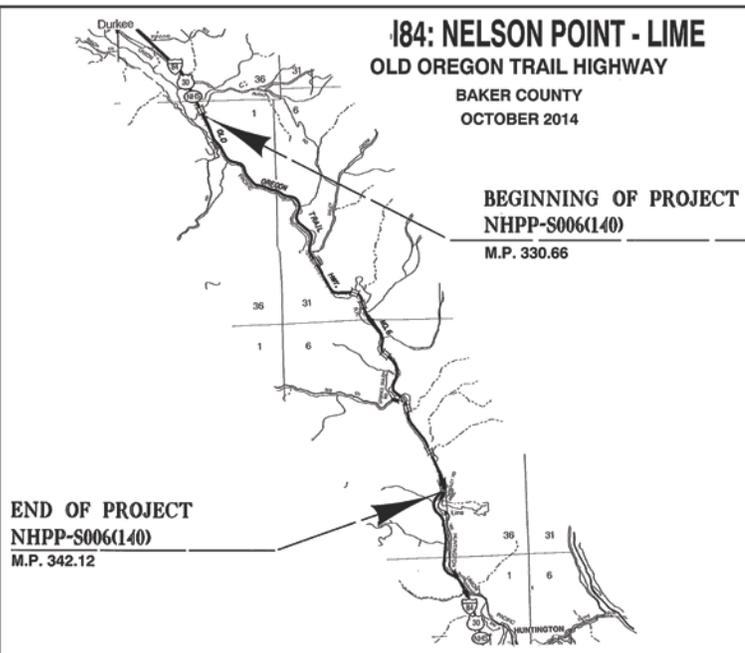

PURPOSE AND NEED: The pavement along this freeway section is nearing the end of its useful life and showing signs of aging (cracks, deteriorating asphalt). Without resurfacing, the pavement conditions will continue to worsen as freeway traffic (10,000 vehicles a day) and harsh winter conditions take their toll.

Restoring a smooth, even surface will greatly enhance safety through this corridor, which includes numerous curves that can be challenging during poor weather conditions.

COST: The total cost of the project is estimated at \$12.1 million.

For more information contact ODOT Project Leader Sean Maloney at (541) 823-4013, or by email at Sean.Maloney@odot.state.or.us

Additional ODOT eastern Oregon project information at www.tinyurl.com/odot-region5

For updated information on highway work and current travel information throughout Oregon, visit

www.tripcheck.com or call the toll-free Oregon road report at 511 or (800) 977-6368.

Visit the ODOT News Media Center at www.oregon.gov/ODOT/COMM/.