INTERSTATE 205 at Strawberry Lane Project

ODOT Project on I-205 at SE Strawberry Lane

Construction Starts in late Spring/early Summer 2015

Stay Informed

Stay up-to-date on this project by visiting the Project Web Page (address on bottom of page).

You may also sign up to receive email updates by contacting Dee Hidalgo (Community Affairs Coordinator) via email Dee.Hidalgo@odot.state.or.us

Project Schedule*

- **Late spring/early summer 2015:** Construction starts
- **Late Summer 2015:** Construction completed

**** Dates are subject to change.***

Project Contact

Dee Hidalgo
ODOT Community Affairs
503-731-8237
Dee.Hidalgo@odot.state.or.us

Night Time Construction Hotline # 503-412-2371

Project Overview

When the Oregon Department of Transportation's (ODOT) OR 224 Sunrise Corridor Project is complete, over-height freight loads which currently access 82nd Drive will no longer be able to use 82nd Drive (the designated Oversized Freight Route) to avoid current height restrictions on Interstate 205 at SE Strawberry Lane. In order to accommodate over-height truck loads on I-205, ODOT will increase the overhead vertical clearance of the SE Strawberry Lane overcrossing structure at I-205 from 17 feet 2 inches to 18 feet 8 inches. In addition, ODOT will seismically retrofit the structure. **Construction is scheduled to start in late spring/early summer 2015.**

Project Elements

- Permanently raise the existing SE Strawberry Lane structure at I-205 eighteen inches to obtain additional vertical clearance on I-205.
- Raise approach embankments to match new grade requirements.
- Construct retaining walls east of I-205 on the north and south sides of SE Strawberry Lane.
- Repave and stripe SE Strawberry Lane to match the final structure grade.
- Construct a seismic retrofit on the existing structure for operational and safety requirements.

What to Expect During Construction

- During construction, Strawberry Lane (between Cason Road and 82nd Drive) closed for up to three months while crews raise overpass structure and construct retaining walls east of I-205. Follow signed detour routes.
- Northbound and southbound left and right lanes of I-205 closed to traffic at night during bridge raising and reconstruction of approach grade and embankments.
- TriMet Bus Service (Line #79) along Strawberry Lane will be rerouted.
- Shared use path closed up to three months near project area. Follow signed detour route.
- Construction activities on I-205 will be necessary during bridge raising.
- Some work will occur at night on I-205 to minimize traffic impacts.
- Occasional flaggers in work zones at each end of Strawberry Lane.

Night time Work Hours: Weekdays (M-F): 8 p.m. - 5 a.m.
Weekends: (Saturdays): 8 p.m. – 8 a.m.; (Sundays): 8 p.m. – 9 a.m.
The noise you hear at night will come from heavy equipment, jackhammering, compressors and construction/concrete trucks. You will see construction equipment on I-205 and on Strawberry Lane.

Project Website:
http://www.oregon.gov/ODOT/HWY/REGION1/Pages/I-205-at-Strawberry-Lane.aspx

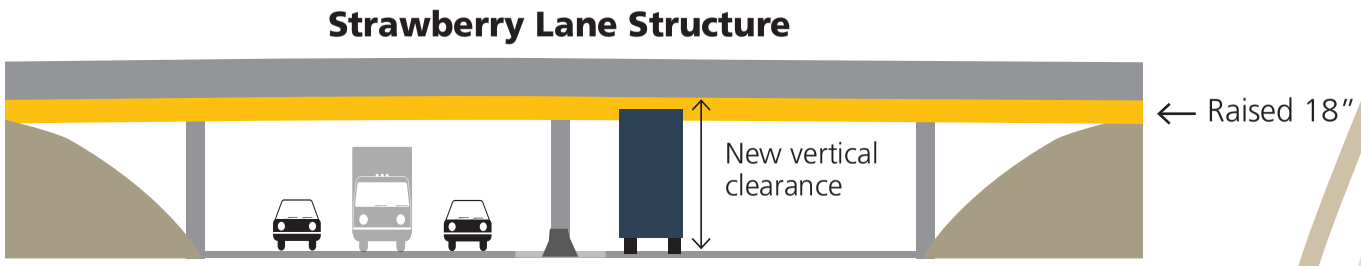

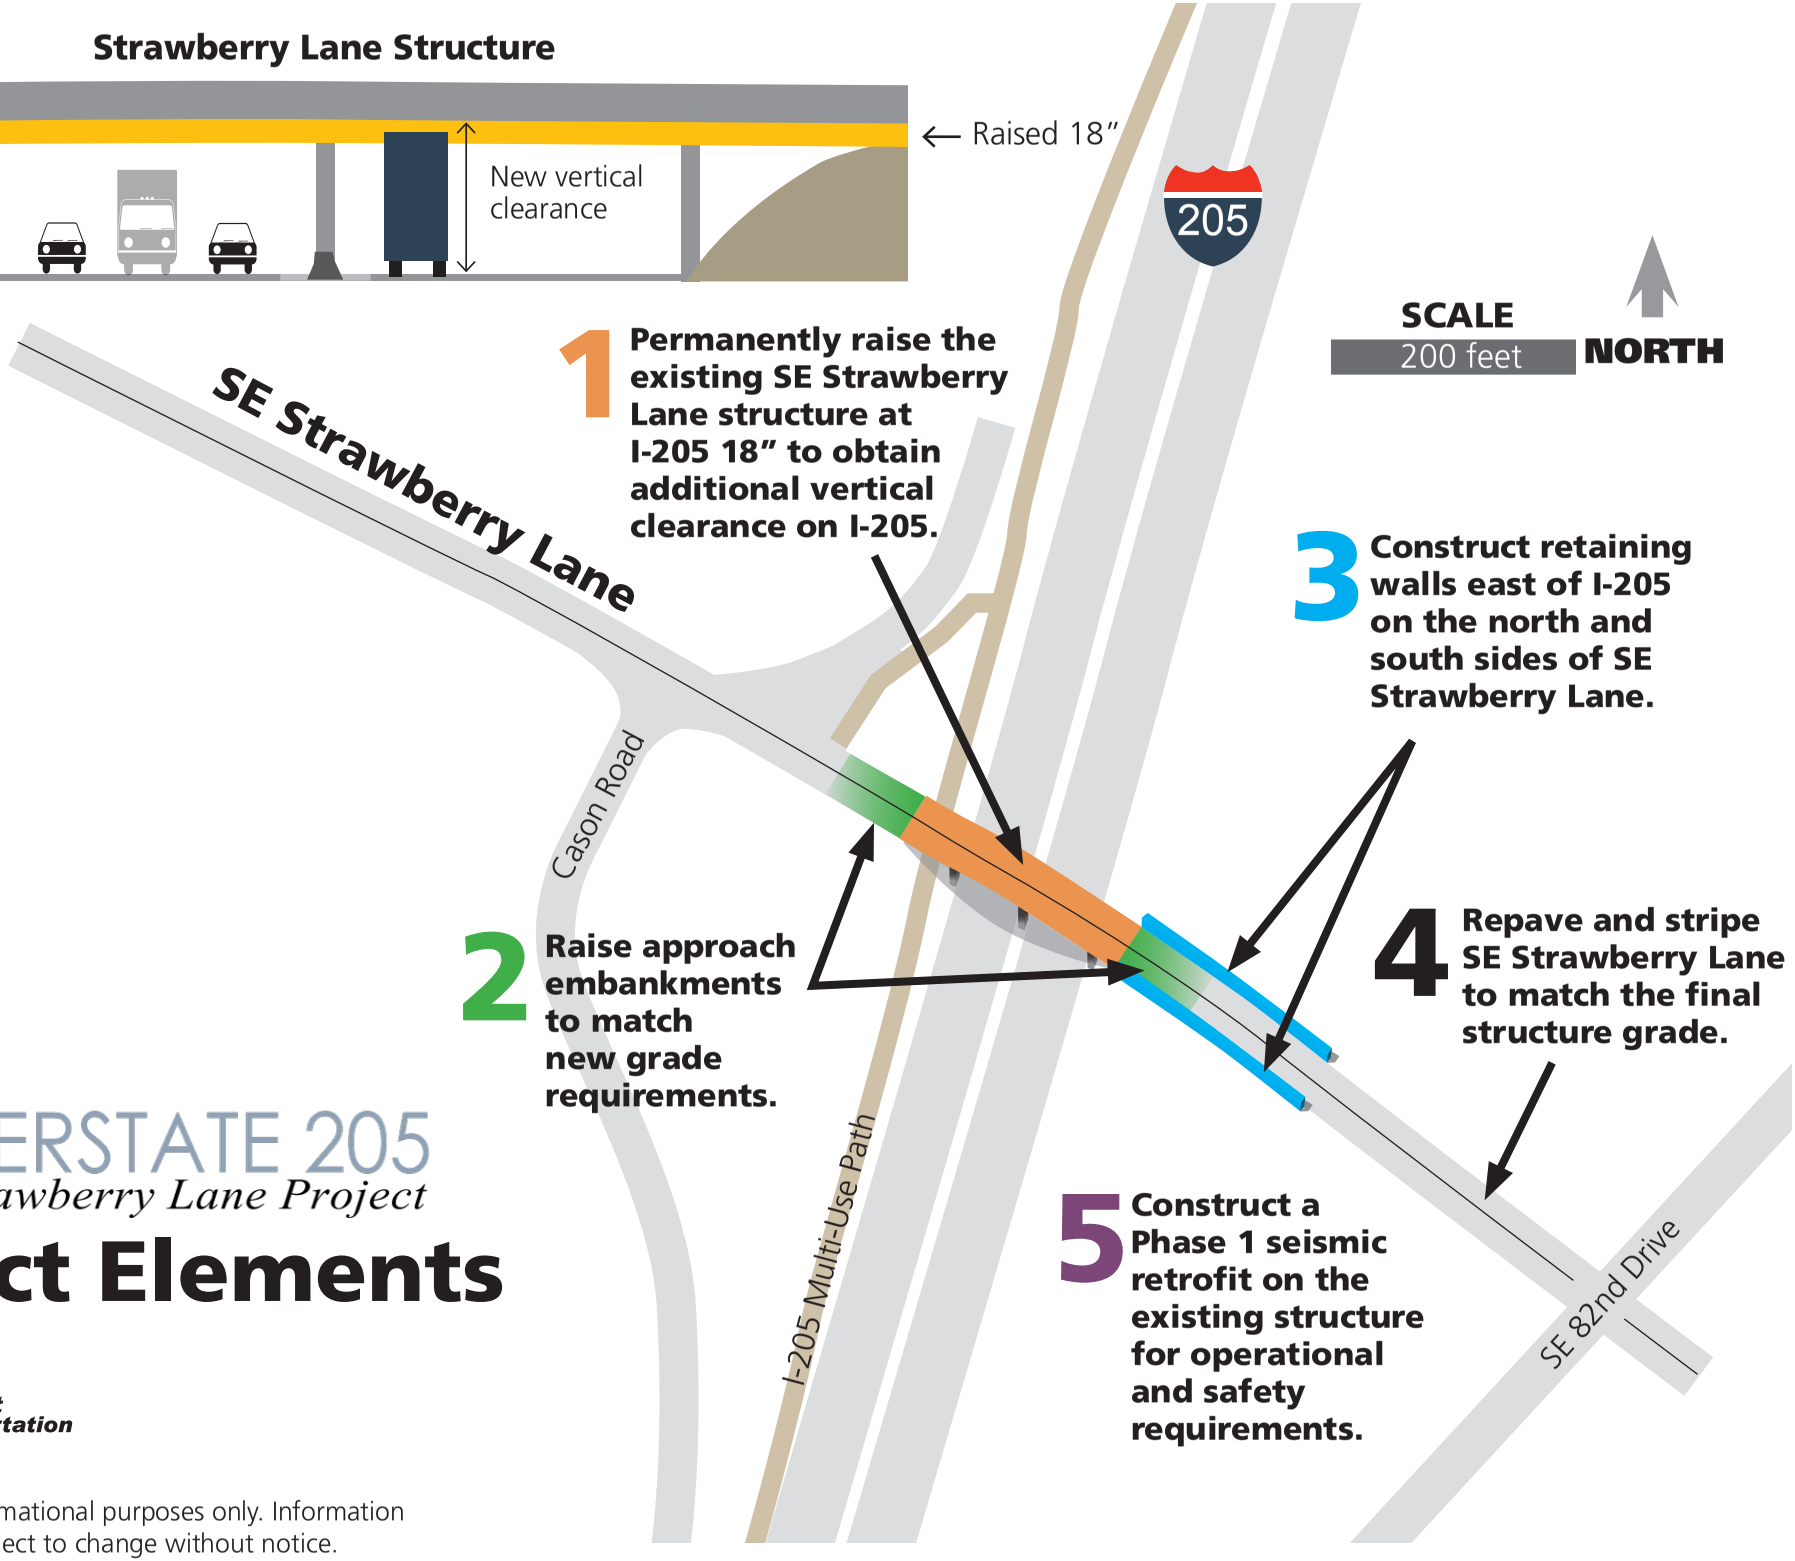

INTERSTATE 205
at Strawberry Lane Project

Project Elements

Oregon Department of Transportation

April 2014

This map is for informational purposes only. Information provided here is subject to change without notice.